



Installation Information

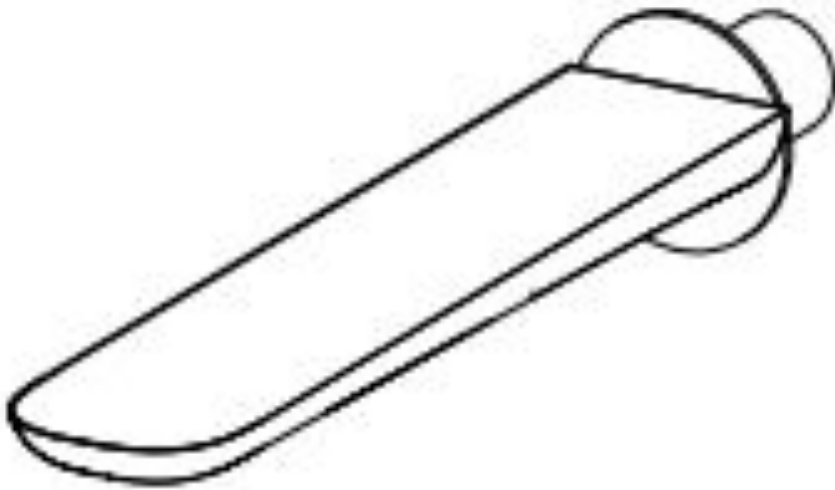

AVA Purity Wall Mounted
Spout

AVA-PU-1004

Technical Specification

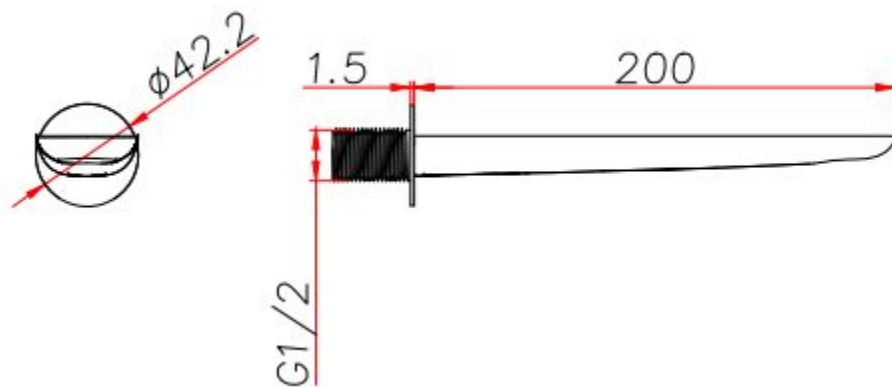


Installation Guide

This product should only be fitted by a qualified plumber, should the work not be completed by a plumber or completed incorrectly – it could result in failure of the product, damage to the property and invalidation of the product guarantee

1. Screw the water outlet brass connector to the water feed ($\frac{1}{2}$ "). Use PTFE tape on the thread, to create a water tight seal on the thread. You must remove the gold connection piece from the spout. Please make sure you keep the small spout ring that is in the box with the spout.

We recommend testing now for leaks.

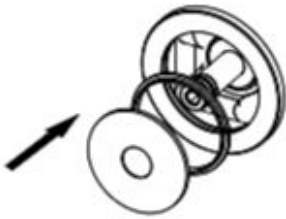

2. Place the flange, small plastic grey ring and spout ring over the gold water outlet Connection.

3. Securely push the spout onto the gold connection, holding the flanges in place and tighten the 2 bottom grub screws.

Test for leaks at this point too



Available Finishes:	Brushed Brass, Brushed Black, Brushed Stainless Steel, Polished Stainless Steel
Minimum Operating Pressure:	NA
Maximum Operating Pressure:	NA
Flow Rate at 1 Bar:	6.2 L/min
Flow Rate at 3 Bar(s):	10.6 L/min
Inlet Diameter:	½"
Outlet Diameter:	NA
Guarantee:	10 Years – Product 3 Years – Finish 2 Years -Cartridges 2 Years – Other Consumable
Reversible:	No
Orientation:	NA



Number of Outlets/Functions:	1
Maximum Hot Water Temperature:	65°C
Maximum Cold Water Temperature:	25°C
Mounting	Horizontal
Installation Depth Min & Max:	NA



Cleaning Instructions & Maintenance

CLEANING

Our products are finished to a very high standard, however specific care is required to maintain the look and finish of your product.

- We strongly recommend against using any off the shelf cleaning products any products etc and the use of these could invalidate any guarantee.
- We recommend cleaning the product with warm water and a clean cloth and immediately dry afterwards to prevent watermarks.
- We also recommend drying down fixtures after each use.
- To remove stubborn marks on the product, please use a 50/50 vinegar and water solution to clean, then immediately rinse and dry. Do not allow the solution to sit on the product.

MAINTENANCE

To maintain your product please follow the advice below annually to ensure the look and performance of your product and to ensure the guarantee is not invalidated. (We recommend seeking the help of a professional if required)

- For shower heads and hand showers
 - Remove the shower head / hand shower product and any O Rings.
 - Rinse the O Rings to remove any limescale and place the shower head / hand shower in a vinegar solution for 1-2 hours and then thoroughly rinse and dry. Make sure to run water through the head prior to use.
 - Remove any aerators from product and rinse them of any limescale build up.
- For Shower Valves
 - Isolate the flow of water and remove any cartridges, soak them in a vinegar solution for 1-2 hours and then re-install them.

