


Installation Information



**Ava Trend 3 Hole Deck Mounted
Bath Mixer**
AVA-TR-1012

Installation Guide

This product should only be fitted by a qualified plumber, should the work not be completed by a plumber or completed incorrectly – it could result in failure of the product, damage to the property and invalidation of the product guarantee

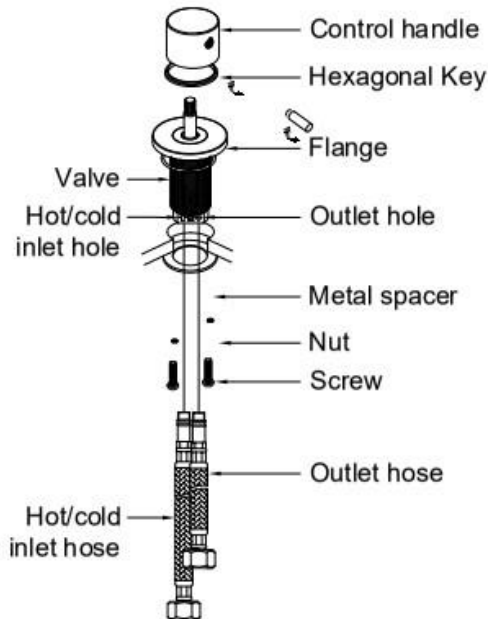


Valve Installation

- 1) Before installation, please ensure the water supply is turned off and the system is clear of any debris.
- 2) Make sure that the tap hole diameters are 35-40mm
- 3) Position the spout and lever handles on the basin. From the underside of the basin, connect the flexible hoses to the base of the tap. The hot water should be on the left and the cold water on the right (**Hand tighten only**)
- 4) Push the handle onto the valve. To align the handle the valve may need to be turned/adjusted. Once satisfied, please tighten the nut.



Installation Guide



- 5) Fix the handle in position using the hexagon key

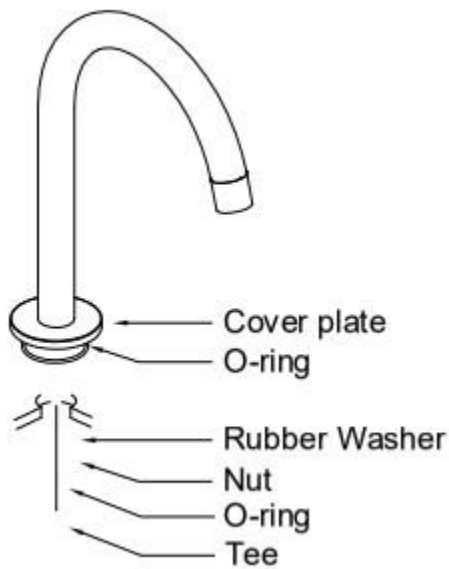

Spout Installation

- 1) Ensure the O-ring is located on the underside of the flange/cover plate.
- 2) Position the spout in place
- 3) From the underside, slide on the rubber washer and screw on the nut to tighten the spout
- 4) Keep the O-ring in the tee and that the inlets are pointing towards each valve.
- 5) Connect the spout to each valve using the flexible hoses.

Technical Specification

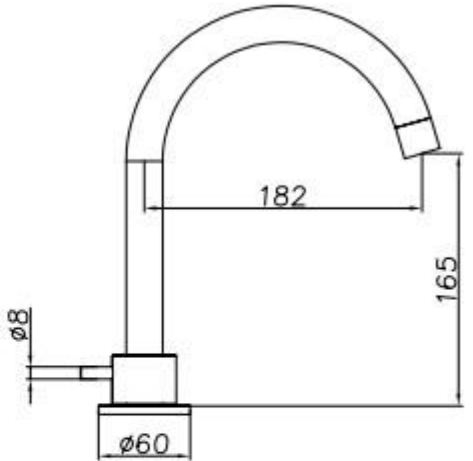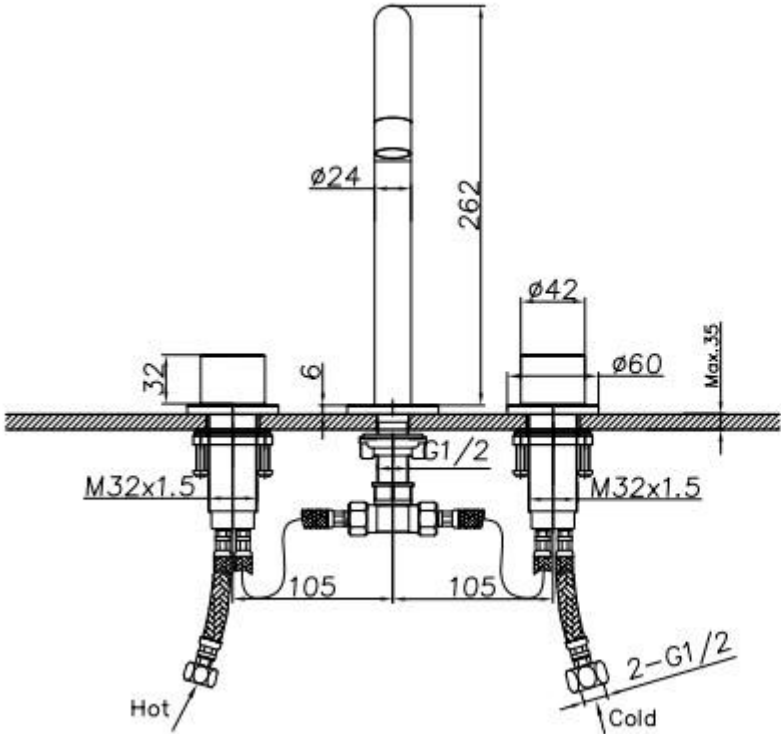

Available Finishes:	Brushed Brass, Brushed Black, Brushed Stainless Steel,, Polished Stainless Steel
Flow Rate at 1 Bar:	12.7 L/min
Flow Rate at 3 Bar(s):	19.2 L/min
Inlet Diameter:	N/A
Guarantee:	10 Years – Product 10 Years – Finish 2 Years -Cartridges 2 Years – Other Consumable
Reversible:	N/A
Number of Handles:	2



Cleaning Instructions & Maintenance

CLEANING

Our products are finished to a very high standard, however specific care is required to maintain the look and finish of your product.

- We strongly recommend against using any off the shelf cleaning products any products etc and the use of these could invalidate any guarantee.
- We recommend cleaning the product with warm water and a clean cloth and immediately dry afterwards to prevent watermarks.
- We also recommend drying down fixtures after each use.
- To remove stubborn marks on the product, please use a 50/50 vinegar and water solution to clean, then immediately rinse and dry. Do not allow the solution to sit on the product.

MAINTENANCE

To maintain your product please follow the advice below annually to ensure the look and performance of your product and to ensure the guarantee is not invalidated. (We recommend seeking the help of a professional if required)

- For shower heads and hand showers
 - Remove the shower head / hand shower product and any O Rings.
 - Rinse the O Rings to remove any limescale and place the shower head / hand shower in a vinegar solution for 1-2 hours and then thoroughly rinse and dry. Make sure to run water through the head prior to use.
 - Remove any aerators from product and rinse them of any limescale build up.
- For Shower Valves
 - Isolate the flow of water and remove any cartridges, soak them in a vinegar solution for 1-2 hours and then re-install them.

